



Characteristics WARNING LIGHTS

Electronic warning lights with LED technology

Power supply 24Vac-dc / 230Vac

Led illumination

Fixed position and adjustable versions

The ample range of electronic warning lights are valid visual warning systems for the movement of automatic devices, built according to the safety standards in force and using LED technology. Highly efficient and adaptable to all situations they satisfy the needs of a modern installation.

The warning lights are available in 24V and 230V versions as follows:

ICON / ICON-WH - 24Vac-dc -230Vac on-board selectable power supply, multi-led.

ICONX - 24Vac-dc on-board selectable power supply, multi-led RGB.

MOLLIGHT4 - 24Vac-dc eight leds.

MOLLIGHT4X - 230Vac eight leds.

LACOLED - 24Vac-dc - 230Vac on-board selectable power supply, multi-led.

LPXLAMP - 24Vac-dc - 230Vac on-board selectable power supply, multi-led.

WALL - 24Vdc strip of led lighting.

WALL + AL2VA - 230Vac output 24Vdc strip of led lighting.

The shape and thicknesses used for the protective parts and the attention to detail paid to the sealing gaskets for all the critical joints make the entire structure weather-proof and immune to vandalism.

All in all this is a unique and unmistakeable appliance, an effective warning system both before and during the activation of the automatic opening device whilst at the same time underlining the quality and service given by a Cardin System.

Product features MOLLIGHT4X

230V eight-led warning light

Warning light made up of eight highly efficient leds and a special optical guide designed by Cardin. The lighting system is housed in a shockproof, opaque, polycarbonate container that accentuates the lighting effect.

A solid base with its contact part in rubber allows the warning light to be installed on any structure and in any position and at the same time (thanks to the simple rotation between the body and the base) it may be fitted to a column or directly on a wall.

The shockproof plastic base is factory set to take a special aerial with a pre-wired BNC connection and at the same time it perfectly protects the power supply connection of the appliance.

Protection grade IP54



> ULTIMATE CARDIN App


MOLLIGHT4X - WARNING LIGHTS

230V eight-led warning light

GENERAL CHARACTERISTICS

Power supply	Vac/dc	230
Operating temperature range	°C	-20...+55
Protection grade	IP	54

OVERALL DIMENSIONS

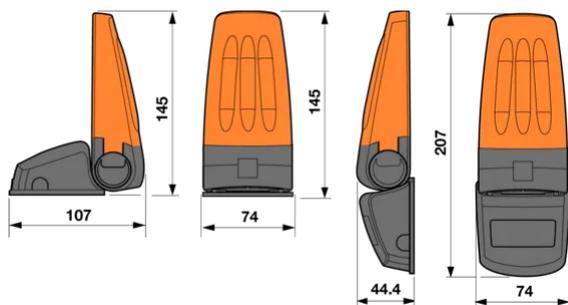

> ULTIMATE CARDIN App