




SERIES FEATURES



PRODUCT FEATURES



Characteristics S486

Digital quartz radio controls with Rolling Codes

868MHz FM rolling code
2⁶⁶ code combinations
Memorisation via radio
Aerial ANQ800-1
Available channels 1-2-3-4
Range 100 - 150m

More than 268 million pre-coded transmitter codes

An innovative radio control system that has gathered together a series of specific appliances under a single working protocol aimed at the remote control of automatic and security installations.

High-technology appliances, protected by robust and practical containers, easy to install and pleasing on the eye in the usual style of Cardin products.

Solutions for all possible uses: control of automatic installations for gates and doors, the command and control of automatic rolling shutters and sun blinds, the activation of alarm and access control systems as well as the activation of all ON-OFF or TIMER-CONTROLLED systems. Adopting the S449 - S486 as a command and control system for remote controlled installations, automatic gates and doors and security systems, doesn't just offer high levels of efficiency but also provides practicality for the user and an extremely useful and manageable appliance for the installer.

A complete and secure system, the best today's technology has to offer, which has been designed and realised with the quality and attention to detail that only CARDIN products can provide.

The "key" to the system is the "simply unique" set of transmitters, made of anti-scratch, shockproof materials that are compact and easy to use. They are available in the following versions: pocket size with 1-2-3-4 channels and wall mounted with four available functions working from a fixed position. The single button radio controls (1 channel) are suitable for alarm systems and access control. The practical and efficient three button radio controls specially designed to command rolling shutters and sun blinds allow the functions open, close and stop to be immediately identified.

A clip is available allowing the insertion of a transponder into the transmitter unit.

Product features TXC4864P0

4-channel precoded transmitter

Container in shockproof plastic material.
3V lithium battery power supply CR2032.



> ULTIMATE CARDIN App

TXC4864P0 - RADIO CONTROLS


4-channel precoded transmitter



GENERAL CHARACTERISTICS

Battery power	Vdc	3
Operating temperature range	°C	-10...+55

OVERALL DIMENSIONS

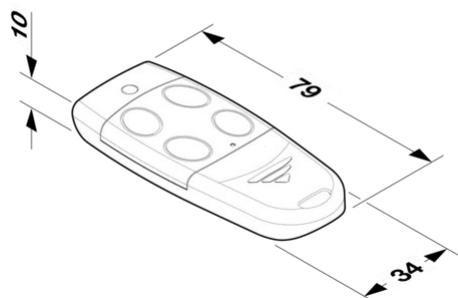

> ULTIMATE CARDIN App